

VS-5526IR

Marshall Electronics


BROADCAST A/V DIVISION

1080p60, Full HD IP Vandal Dome Camera




FEATURES

- 60FPS @ 1920 x 1080
- True WDR
- Dual Power (DC/PoE)
- Quadruple Streaming
- IP68
- ONVIF, PSIA Compliant

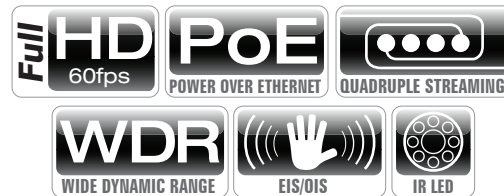

DIMENSIONS

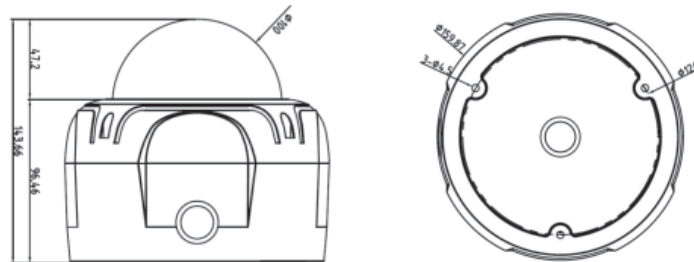

SPECIFICATIONS

Camera	Image sensor	1/2.8" Progressive scan CMOS
	Lens type	Auto DC iris, Varifocal lens, IR cut filter
	Lens mount	N/A
	Zoom	N/A
	Focal length	f= 2.8 ~ 11mm
	Maximum aperture ratio	F1.2
	Angle of view	Horizontal: 92.5° (wide) ~ 29.0° (tele), Vertical: 68.0° (wide) ~ 21.7° (tele)
	Minimum illumination	0.1lux (Color), 0.001 lux (B/W) with IRE50 @ F1.2
	Electronic shutter speed	1/60 ~ 1/50,000sec
	Privacy masking	8 regions
	Flip mode	Horizontal, Vertical
	Image enhancement	AGC, AE, AWB, TDN, 2D/3DNR, DSS, True WDR, Defog, DIS, DPC, LSC
	IR LED	24pcs, 20m
	Video	Compression
Frame rate		Max 60fps @ 1920x1080
Bitrate		Primary: 32Kbps ~ 16Mbps, Secondary x3: 32Kbps ~ 4Mbps
Resolution		352x240 ~ 1920x1080
Streaming		Primary: H.264, Secondary x 3: H.264/MJPEG
Burn-in OSD		Multi-lingual
Output		Composite

1080p60, Full HD IP Vandal Dome Camera

SPECIFICATIONS

Audio	Compression	G.711 / AAC
	Sampling rate	G.711: 8 KHz, AAC: 32 kHz / 44.1 kHz / 48 kHz
	Bitrate	G.711: 64Kbps, AAC: 64Kbps/128Kbps
	Streaming	G.711: Full-duplex, AAC: Half-duplex
	Input / Output	1 x Line-In (mono, RCA type), 1 x Line-Out (mono, RCA type)
Network	Interface	Ethernet 10/100/1000base-T (RJ-45)
	Protocol	IPv4/v6, TCP, UDP, IGMP(Multicast), DHCP, HTTP, HTTPS, RTP, RTSP, FTP, SNMP, SMTP, UPnP, WS-Discovery, Zero Configuration, DDNS
	Security	Password protection, IP address filtering, HTTPS encryption
	API	MEI Protocol/SDK, ONVIF, PSIA, MPEG-TS
Event	Event sources	Motion, Sensor input, Client disconnection
	Event actions	Notification (E-mail), FTP, PTZ preset, Alarm control, Recording
General	Housing	Vandal dome, IP68
	Certifications	CE, FCC, KC, RoHS
	External devices	1 x Sensor-In (dry contact, NO/NC) 1 x Alarm-Out (dry contact, NO) 1 x RS-485 port
	Edge storage	SD/SDHC slot
	Power supply	Min DC12V/1.5A, PoE (Power over Ethernet): 802.3af
	Power consumption	DC12V/PoE: Max DC12V/8.4W
	Operating condition	-10°C ~ 50°C (14°F ~ 122°F) / 20% ~ 80% RH
	Dimension	Ø100 for vandal dome, Ø149.8 for bottom
Weight	1540g	